


Sechskantmutter mit Klemmteil nicht metallischer Einsatz (Nylon) DIN EN ISO 10512

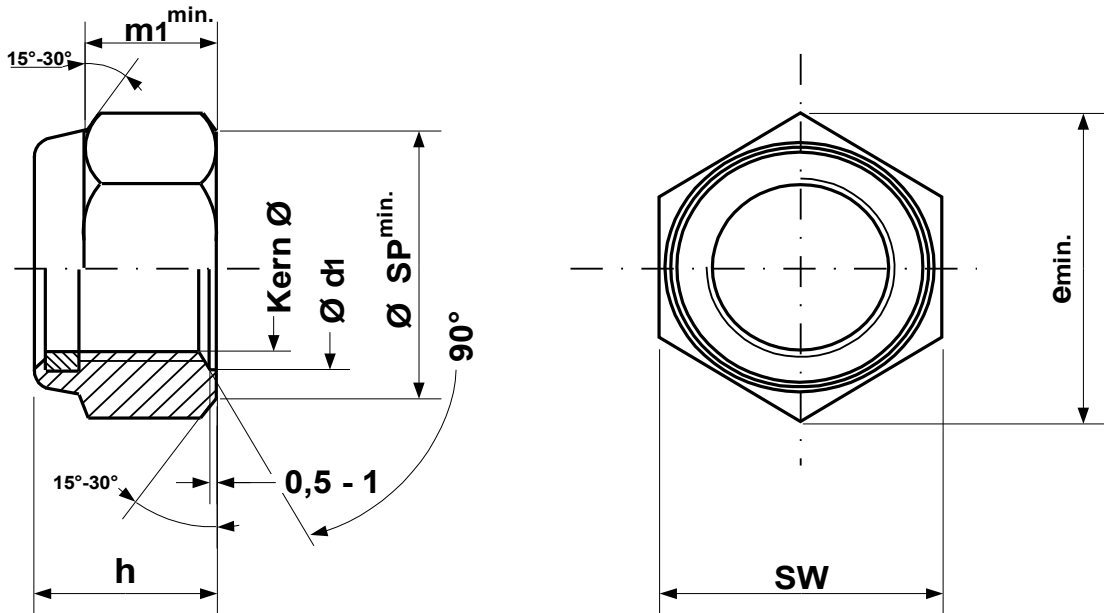

Sorte	Einsatzg.	SW	h	KernØ	min.	min.		Ød1
	Fertigg.				m1	ØSP		
M 16x1,5	49,9 g	24,00	19,10	14,676	14,1	22,49		17,3
	34,6 g	23,67	17,80	14,376				16,0
M 20x1,5	99,8 g	30,00	22,80	18,676	16,9	27,70		21,6
	65,6 g	29,16	20,70	18,376				20,0
M 24x2	152,4 g	36,00	27,10	22,210	20,2	33,25		25,9
	112,3 g	35,00	25,00	21,835				24,0
M 30x2	331,4 g	46,00	32,60	28,210	24,3	42,75		32,4
	227,1 g	45,00	30,10	27,835				30,0
M 36x3	570,0 g	55,00	38,90	33,252	29,4	51,11		38,9
	399,6 g	53,80	36,40	32,752				36,0