


Nylon Insert Hexagon Nut

ISO 7040

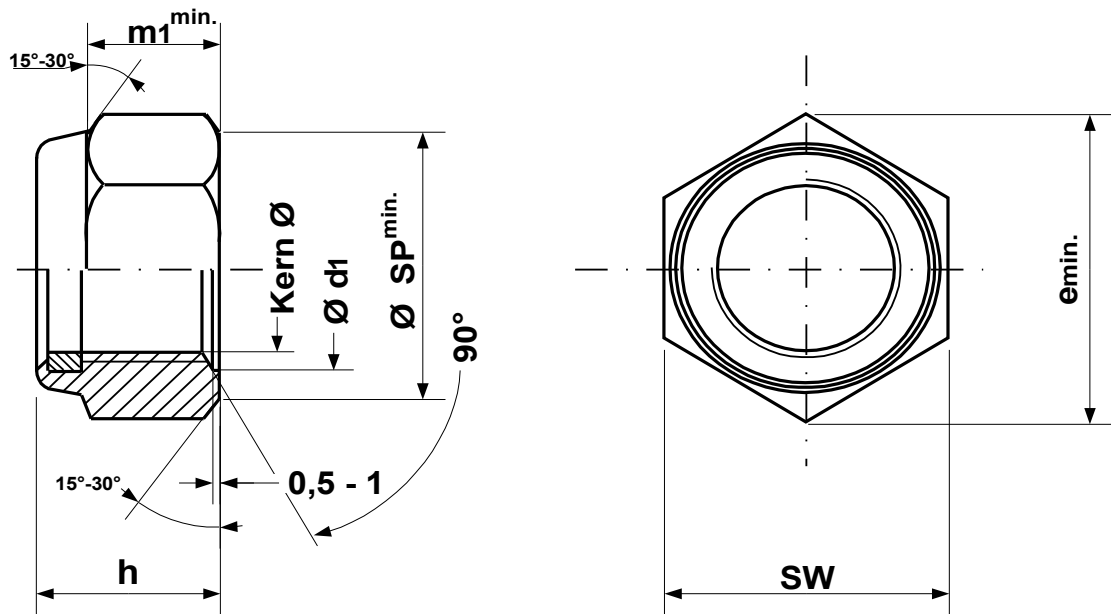

Sorte	Einsatzg.	SW	h	KernØ	min.	min.		Ød1
	Fertigg.				m1	ØSP		
M 16	42,0 g	24,00	19,10	14,210	14,1	22,5		17,3
	29,2 g	23,67	17,80	13,835				16,0
M 20	87,9 g	30,00	22,80	17,744	16,9	27,7		21,6
	59,9 g	29,16	20,70	17,294				20,0
M 24	135,5 g	36,00	27,10	21,252	20,2	33,2		25,9
	100,0 g	35,00	25,00	20,752				24,0
M 30	308,0 g	46,00	32,60	26,771	24,3	42,7		32,4
	212,0 g	45,00	30,10	26,221				30,0
M 36	536,4 g	55,00	38,90	32,270	29,4	51,1		38,9
	378,7 g	53,80	46,40	31,670				36,0